




### Prolunga cilindrica per sistema Duo-Lock™

Prolunga cilindrica per sistema di frese a testina modulare Duo-Lock™, si possono calettare o inserire in mandrini a forte serraggio, idraulici e a pinza.

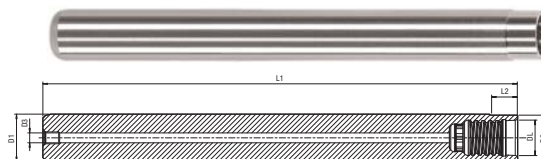


| Codice     | € | D1 (h5) (mm) | D2 (mm) | D3 (mm) | DL | L1 (mm) | L2 (mm) |
|------------|---|--------------|---------|---------|----|---------|---------|
| A540650010 | ◇ | 10           | 9,6     | 2,5     | 10 | 100     | 5       |
| A540650012 | ◇ | 12           | 11,5    | 2,5     | 12 | 120     | 6       |
| A540650016 | ◇ | 16           | 15,5    | 3       | 16 | 160     | 8       |

| Codice     | € | D1 (h5) (mm) | D2 (mm) | D3 (mm) | DL | L1 (mm) | L2 (mm) |
|------------|---|--------------|---------|---------|----|---------|---------|
| A540650020 | ◇ | 20           | 19,3    | 3       | 20 | 200     | 10      |
| A540650025 | ◇ | 25           | 24      | 5       | 25 | 250     | 12,5    |
| A540650032 | ◇ | 32           | 31      | 5       | 32 | 250     | 16      |



### Prolunga conica per sistema Duo-Lock™ con smusso

Prolunga conica con scarico di 5°, per sistema di frese a testina modulare Duo-Lock™, si possono calettare o inserire in mandrini a forte serraggio, idraulici e a pinza.

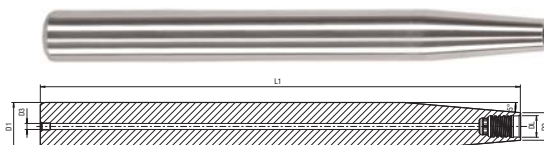

| Codice     | € | D1 (h5) (mm) | D2 (mm) | D3 (mm) | DL | L1 (mm) |
|------------|---|--------------|---------|---------|----|---------|
| A540700012 | ◇ | 12           | 9,6     | 2,5     | 10 | 120     |
| A540700016 | ◇ | 16           | 9,6     | 2,5     | 10 | 160     |
| A540700020 | ◇ | 20           | 9,6     | 2,5     | 10 | 200     |
| A540700160 | ◇ | 16           | 11,5    | 2,5     | 12 | 160     |
| A540700200 | ◇ | 20           | 11,5    | 2,5     | 12 | 200     |
| A540700201 | ◇ | 20           | 15,5    | 3       | 16 | 200     |


| Codice     | € | D1 (h5) (mm) | D2 (mm) | D3 (mm) | DL | L1 (mm) |
|------------|---|--------------|---------|---------|----|---------|
| A540700250 | ◇ | 25           | 15,5    | 3       | 16 | 250     |
| A540700251 | ◇ | 25           | 19,3    | 3       | 20 | 250     |
| A540700320 | ◇ | 32           | 24      | 5       | 25 | 250     |
| A540700400 | ◇ | 40           | 31      | 5       | 32 | 250     |
| A540700500 | ◇ | 50           | 31      | 5       | 32 | 250     |



### Mandrino portatestine intercambiabili ISO 40 DIN 69871

Mandrino portatestine intercambiabili ISO 40 DIN 69871 **forma ADB** per l'inserimento di testine intercambiabili con il sistema Duo-Lock™. Fornito con **bilanciatura standard G 2.5 25000 giri/min.**

Forma AD/B DIN 69871




| Codice     | € | D1 (mm) | D2 (mm) | DL | L1 (mm) | L2 (mm) | A (mm) | Tipo  |
|------------|---|---------|---------|----|---------|---------|--------|-------|
| A540750010 | ◇ | 10      | 9,6     | 10 | 21,9    | 5       | 41     | corto |
| A540750012 | ◇ | 12      | 11,5    | 12 | 21,9    | 6       | 41     | corto |
| A540750016 | ◇ | 16      | 15,5    | 16 | 30,9    | 8       | 50     | corto |
| A540750020 | ◇ | 20      | 19,3    | 20 | 30,9    | 10      | 50     | corto |
| A540750025 | ◇ | 25      | 24      | 25 | 36,9    | 12,5    | 56     | corto |
| A540750032 | ◇ | 32      | 31      | 32 | 45,9    | 16      | 65     | corto |



### Mandrino portatestine intercambiabili ISO 50 DIN 69871

Mandrino portatestine intercambiabili ISO 50 DIN 69871 **forma ADB** per l'inserimento di testine intercambiabili con il sistema Duo-Lock™. Fornito con **bilanciatura standard G 2.5 25000 giri/min.**

Forma AD/B DIN 69871



| Codice     | € | D1 (mm) | D2 (mm) | DL | L1 (mm) | L2 (mm) | A (mm) | Tipo  |
|------------|---|---------|---------|----|---------|---------|--------|-------|
| A540800010 | ◇ | 10      | 9,6     | 10 | 60,9    | 5       | 80     | corto |
| A540800012 | ◇ | 12      | 11,5    | 12 | 60,9    | 6       | 80     | corto |
| A540800016 | ◇ | 16      | 15,5    | 16 | 60,9    | 8       | 80     | corto |
| A540800020 | ◇ | 20      | 19,3    | 20 | 60,9    | 10      | 80     | corto |
| A540800025 | ◇ | 25      | 24      | 25 | 60,9    | 12,5    | 80     | corto |
| A540800032 | ◇ | 32      | 31      | 32 | 60,9    | 16      | 80     | corto |